


ID ANT1710 / 690 Crystal Gate Excellence

HF GATE ANTENNA

- Excellent RFID performance
- Possible passage width up to 180 cm
- Cost-effective solution
- Transparent design
- Certificated performance
- Integrated radar people counter
- Flexible IT integration
- International approvals

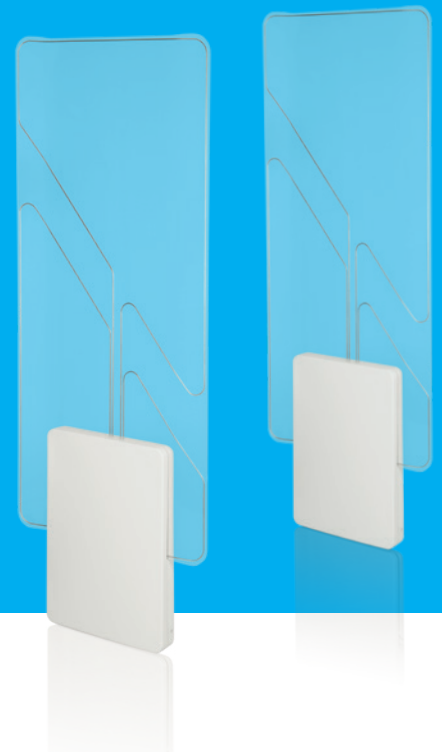

Top Performance

- > Excellent 3D identification rates
- > Comfortable passage width up to 180 cm due to a patented configuration
- > Directional people counter with "false alarm suppression"
- > DVD and CD detection

Transparent Design

- > Transparency of almost 100% (acrylic plate)
- > Alarm light integrated in acrylic plate

Easy Installation

- > Complete solution
- > Antenna is tuned ex works
- > Comprehensive service software
- > Integrates all the electronics

Optional Functions

- > Installation of people counter for up to 3 passages
- > Base cover in custom colors
- > Mounting plate for quick assembly / disassembly and special floors

Flexible IT Integration

- > Interfaces: USB, Ethernet (TCP/IP)
- > Alternative: "Stand Alone" Mode
- > SDKs for Windows, Linux, Java and more
- > Remote maintenance and diagnostics

International Approvals

- > Radio licenses: ETSI (Europe), FCC (USA), IC (Canada)
- > Safety: UL 62368-1, IEC 62368-1
- > Performance: ISO 18046-4, VDI 4478-1

MODERN DESIGN MEETS EXCELLENT RFID PERFORMANCE

The high-performance cost-effective solution with integrated radar people counter allows flexible integration into existing systems.

Technical data

Dimensions (w x h x d)	690 mm x 1770 mm x 72 mm*
Weight	
Type A	approx. 25 kg / 29.5 kg with packaging
Type B	approx. 24 kg / 28.1 kg with packaging
Housing	Acrylic glass and ABS UV stabilized
Color	Crystal clear (acrylic panel), signal white (base) more colors available on request
Supply voltage	24 V DC \pm 15%
Power consumption	max. 32 VA
Operating frequency	13.56 MHz
Antenna tuning	ID ISC DAT (automatic)
Alarm functions	Automatic without host connection; with optical and acoustic indicator; EAS, AFI, UID/SNR
Transponders	ISO 15693, ISO 18000-3 Mode 1, NXP I-Code 1
Interfaces	USB, Ethernet
Aisle width	
Unidimensional	up to 180 cm (70.9 inches)
Tridimensional	up to 160 cm (63 inches)
Temperature range	
Operation	-25 °C up to +50 °C
Storage	-25 °C up to +70 °C

* Tolerances \pm 3 mm



ID ANT1710 / 690

Order Description

ID ANT1710/690-EA	5319.001.01	Crystal Gate Excellence (Base), Gate Antenna with 4 Chanel Reader and People Counter
ID ANT1710/690-EB	5318.001.01	Crystal Gate Excellence
ID ANT.GPC-E2	4718.000.00	Extension Radar Detector
ID ANT.GPC	4704.000.00	Gate People Counter (GPC)
ID ANT.CRG-MP	4412.000.00	Crystal Gate Mounting Plate
ID ANT.MUX.M5.GMK	6696.000.00	5-times Antenna Multiplexer with Gates Mounting Kit included

Examples

1 aisle:	1 antenna type A (incl. 4 Chanel Reader, GPC and Power Supply) 1 antenna type B (incl. 2.5 m data cable)
2 aisles:	1 antenna type A (incl. 4 Chanel Reader, GPC and Power Supply) 2 antennas type B (incl. 2.5 m data cable) 1 Extension Radar Detector 5-times Antenna Multiplexer with Gates Mounting Kit included (ID ANT.MUX.M5.GMK)
3 aisles:	1 antenna type A (incl. 4 Chanel Reader, GPC and Power Supply) 3 antennas type B (incl. 2.5 m data cable) 1 Extension Radar Detector (option) 1 GPC for 3 passages (option) 5-times Antenna Multiplexer with Gates Mounting Kit included (ID ANT.MUX.M5.GMK)